

# DS14C89A Quad CMOS Receiver

#### **General Description**

The DS14C89A, pin-for-pin compatible to the DS1489A/MC1489A, ia a quad receiver designed to interface data terminal equipment (DTE) with data circuit-terminating equipment (DCE). These devices translate levels conforming to EIA-232E and CCITT V.28 standards to TTL/CMOS logic levels.

The device is fabricated in low threshold CMOS metal gate technology. The device provides very low power consumption compared to their bipolar equivalents: 900  $\mu$ A (DS14C89A) versus 26 mA (DS1489A).


The DS14C89A provides on chip noise filtering which eliminates the need for external response control filter capacitors.

When replacing the DS1489A with the DS14C89A, the response control filter pins can be tied high, low, or not connected.

#### **Features**

- Meets EIA/TIA-232-E and CCITT V.28 Standards
- Failsafe Output High for Open Input
- LOW Power consumption
- On chip noise filter
- Available in SOIC Package

#### **Connection Diagram**



Order Number DS14C89AN, DS14C89AM, See NS Package Number M14A, N14A

#### **Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

 V<sub>CC</sub>
 +6V

 Input Voltage
 -30V to +30V

 Receiver Output Voltage
 (V<sub>CC</sub>) +0.3V to GND-0.3V

 Junction Temperature
 +150°C

 Continuous Power Dissipation @ +25°C (Note 2)

 N Package
 1513 mW

 M Package
 1063 mW

(Soldering 4 seconds)  $+260^{\circ}\text{C}$ Storage Temp. Range  $-65^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ ESD Rating  $\geq$  1.8 kV, Typically  $\geq$  2 kV (HMB, 1.5 k $\Omega$ , 100 pF)

## Recommended Operating Conditions

#### **Electrical Characteristics**

Lead Temp.

Over recommended operating conditions, unless otherwise specified

Symbol	Parameter	Conditions		Min	Тур	Max	Units
V <sub>TH</sub>	Input High Threshold			1.3		2.7	V
V <sub>TL</sub>	Input Low Threshold			0.5		1.9	V
V <sub>HY</sub>	Typical Input Hysteresis				1.0		V
I <sub>IN</sub>	Input Current	V <sub>IN</sub> = +25V	$V_{CC} = +4.5V \text{ to } +5.5V$	3.6		8.3	mA
		V <sub>IN</sub> = -25V		-3.6		-8.3	mA
		V <sub>IN</sub> = +3V		0.43		1.0	mA
		$V_{IN} = -3V$	1	-0.43		-1.0	mA
		V <sub>IN</sub> = +15V	V <sub>CC</sub> = 0V (Power-Off)	2.14		5.0	mA
		$V_{IN} = -15V$	(Note 4)	-2.14		-5.0	mA
		V <sub>IN</sub> = +3V		0.43		1.0	mA
		$V_{IN} = -3V$		-0.43		-1.0	mA
V <sub>OH</sub>	Output High Voltage	$V_{IN} = V_{TL}$ (min)	$I_{OUT} = -3.2 \text{ mA}$	2.8	4.0		V
			$I_{OUT} = -20\mu A$	3.5	4.7		V
V <sub>OL</sub>	Output Low Voltage	$V_{IN} = V_{TH}$					
		(max)			0.15	0.4	V
		$I_{OUT} = +3.2 \text{ mA}$					
I <sub>CC</sub>	Supply Current	No Load, V <sub>IN</sub> = 2.7V or 0.5V			0.5	900	μΑ

#### **AC Electrical Characteristics** (Note 3)

Over recommended operating conditions, unless otherwise specified, C<sub>1</sub> = 50 pF

Symbol	Parameter	Conditions	Min	Тур	Max	Units
t <sub>PLH</sub>	Propagation Delay Low to High	Input Pulse Width ≥ 10 μs		3.5	6.5	μs
t <sub>PHL</sub>	Propagation Delay High to Low	Input Pulse Width ≥ 10 μs		3.2	6.5	μs
t <sub>sk</sub>	Typical Propagation Delay Skew			400		ns
t <sub>r</sub>	Output Rise TIme			40	300	ns
t <sub>f</sub>	Output Fall Time			40	300	ns
t <sub>nw</sub>	Pulse Width assumed to be Noise				1.0	μs

**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of "Electrical Characteristics" specify conditions for device operation.

Note 2: Derate N Package 12.1 mW/°C, and M Package 8.5 mW/°C above +25°C.

Note 3: AC input waveforms for test purposes:  $t_r = t_f = 200$  ns,  $V_{IH} = +3V$ ,  $V_L = -3V$ , f = 20 KHz.

Note 4: Under the power-off supply conditions it is assumed that the power supply potential drops to zero (0V) and is replaced by a low impedance or short circuit to ground.

www.national.com 2

#### **Parameter Measurement Information**




FIGURE 1. Receiver Load Circuit

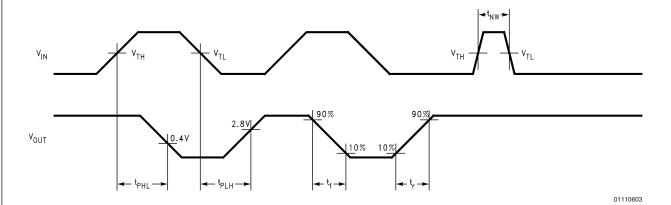


FIGURE 2. Receiver Switching Waveform (Note 3)

#### **Typical Application Information**




FIGURE 3. Receiver Block Diagram



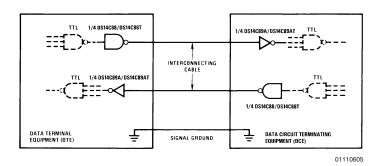



FIGURE 4. EIA-232D Data Transmission

3 www.national.com


### Physical Dimensions inches (millimeters) unless otherwise noted





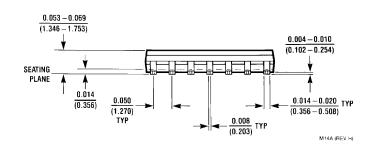

Order Number DS14C89AM NS Package Number M14A

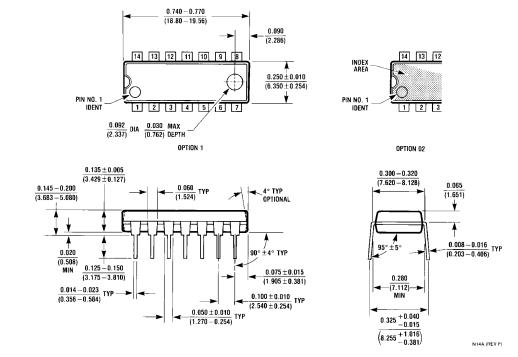

Order Number DS14C89AN NS Package Number N14A

www.national.com

#### **Notes**

#### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **BANNED SUBSTANCE COMPLIANCE**

National Semiconductor certifies that the products and packing materials meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.



National Semiconductor Americas Customer Support Center

Email: new.feedback@nsc.com Tel: 1-800-272-9959

www.national.com

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86

Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor Asia Pacific Customer Support Center Email: ap.support@nsc.com National Semiconductor Japan Customer Support Center Fax: 81-3-5639-7507 Email: jpn.feedback@nsc.com Tel: 81-3-5639-7560